




106

1:2 Microphone Line & Distribution Amplifier



The **106** is a high-quality line and distribution amplifier for balanced mono microphone signals. It takes one dynamic or condenser microphone input and distributes the signal to two line-level outputs.

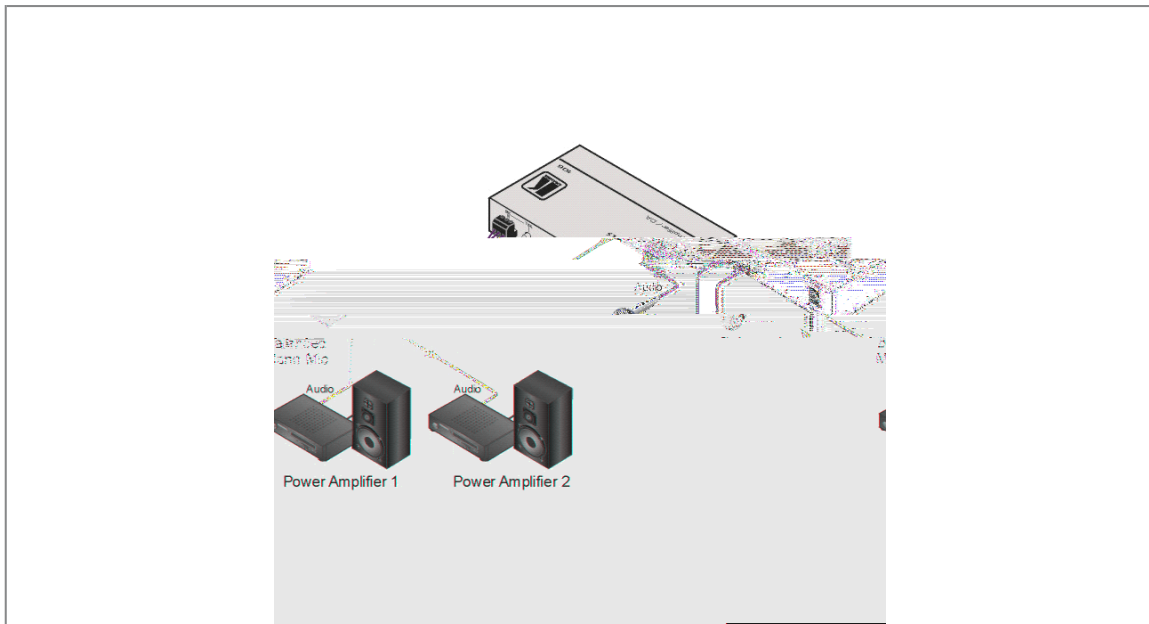



FEATURES

- Mic Input Selector - Condenser or dynamic.
- Phantom Power - 48V DC.
- S/N Ratio - 81dB.
- Level (Gain) Controls - Individual and master output adjustments.
- Compact Kramer TOOLS™ - 3 units can be rack mounted side-by-side in a 1U rack space with the optional RK-3T rack adapter.

TECHNICAL SPECIFICATIONS

INPUT:	1 balanced mono microphone on a 3-pin terminal block connector.
OUTPUTS:	2 balanced mono line outputs on 3-pin terminal block connectors.
MAX. OUTPUT LEVEL:	27Vpp (22dBu).
BANDWIDTH:	>40kHz.
S/N RATIO:	81dB.
CONTROLS:	Mic. type selector pushbutton, -14dB to +68dB LINE OUT trimmers (master trimmer at max.), +37dB to +68dB master trimmer (line out trimmer at max.)
COUPLING:	Input, AC; output, DC.
AUDIO THD +NOISE:	0.18%.
AUDIO 2nd HARMONIC:	0.16%.
POWER SOURCE:	12V DC, 132mA.
DIMENSIONS:	12cm x 7.5cm x 2.5cm (4.7" x 2.95" x 0.98") W, D, H.
WEIGHT:	0.3kg (0.66lbs) approx.
ACCESSORIES:	Power supply, mounting bracket
OPTIONS:	RK-3T 19" rack adapter.